


RSD

Security Scanners

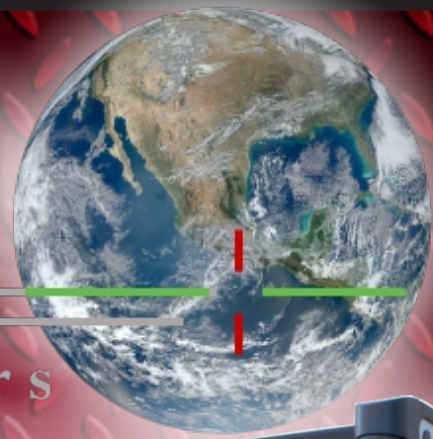


Patented Advanced Technology Metal Detection System

The Intelliscan can operate in "All Metal Mode" or advance "Discrimination Modes". Factory Presets and under programmable modes can target specific types of metal or alloys for enhanced loss prevention.

INTELLISCAN 6 ZONE

- 6 Horizontal Detection Zones
- Discrimination Mode Capable
- Factory & User Definable Presets
- Integrated Floor Mounting Boots
- Front Panel LED's
- Optional RangerNet™ Networking
- United States Patented Technology





INTELLISCAN

6-Zone Walk through Metal Detector



The 6-Zone meets Regulatory requirements for Electromagnetic safety.

Ranger Products Have no effects on pregnancy and people with peace makers

Specifications

Applications of the Intelliscan Six-Zone

- | | | |
|-------------------------|--------------------------|----------------------------|
| . Airports and Seaports | . Hospitals | . Sports Stadiums |
| . Government Buildings | . Banks | . Public Transportation |
| . Embassies | . Financial Institutions | . Public Landmarks |
| . Police Facilities | . Colleges and Schools | . Factories and Warehouses |
| . Courthouses | . Hotels and Casinos | . Broadcast Studios |
| . Prisons and jails | . Power plants | . Museums |
| . Military Bases | . Research Sites | . Night Clubs |

General Features of the Intelliscan Multi-Zone

- | | |
|---|---|
| . 6 Horizontal Detection Zones | . Interference Rejection Circuit |
| . Advanced Discrimination Capabilities | . Adjustable Zone Sensitivity |
| . Security Level Program Factory Presets | . Security Password |
| . User Programmable Processor | . Continuous Wave Technology |
| . Digital Signal Processing and Diagnostics | . Harmless to Pacemakers and Pregnant Women |

Optional Features Available

- . RangerNet Networking Software & Hardware
- . Wheel Kit for Easy Transporting
- . Back Up Battery System
- . Fiber Optic Remote Display
- . Executive Styling Options
- . Remote Control

Dimensions, Weight, and Power Requirements



Power Requirements:

Input Voltage: 90VAC to 260VAC
 Input Frequency: 47Hz to 63Hz
 Rated: 50W

Shipping Dimensions and Weight

Header:
 34"x11"x25" (85x27.5x62.5cm)
 371lbs (15.45 Kg)

Side Panels:
 91"x9"x27" (227.5x22.5x67.5cm)
 144lbs (65.45 Kg)

Warranty Information

Ranger Security Detectors, Inc. Warrants the 6-Zone against defects in workmanship or materials, under normal use, for a 2-year period from the date of purchase to the original user. Liability in all events is limited to purchase price paid. Liability under aforesaid warranty is limited to replacing cost prepaid to Ranger Security Detectors El Paso factory.

RANGER™

11900 Montana Avenue
 El Paso, Texas 79936
 Tel No. 915-590-4441
 Fax No. 915-592-1043
 Website: www.rsdsecurityscanners.com